


ISOSOUND®

ISOSOUND is a new sound absorption and sound insulation product of high performance, specially designed to meet the most demanding requirements for sound isolation. The material is composed of open - cell flexible elastomeric foam based on synthetic rubber.

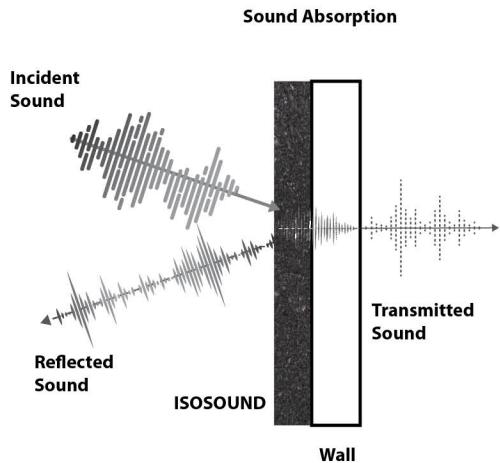


Properties	Value 150 kgr/m ³	Value 250 kgr/m ³	TEST Method	Lab/ TEST Reports		
Density (kgr/m³)	≥ 100	250 (-30/ +50)	EN 13470, EN 1602	self monitoring		
Weighted Sound Reduction Index - Rw(C;Ctr)	40(-2; -7) dB	43(-1; -5) dB	DIN EN ISO 140 - 3: 2005 EN ISO 717 - 1: 2006	Aristotle University of Thessaloniki		
Sound Absorption	Absorption coefficient up to 0.98	EN 354	self monitoring			
Thermal Conductivity (λ)	20°C - 0.044 W/ mk	20°C - 0.048 W/ mk	EN 12667	self monitoring		
Operating Temperatures (°C)	-40°C to +85°C	Annex B EN 14304 EN 14706	self monitoring			
Fire Rating (FR)	Euroclass E, does not spread flames, self - extinguishing, does not drip	Classification according EN 13501-1	self monitoring			
Limiting Oxygen Index (LOI)	32%	EN ISO 4589-1	self monitoring			
Tensile Strength (Kpa)	75 - 85 Kpa	180 - 200 Kpa	ISO 1798	self monitoring		
Elongation at Break	40%	50%	ISO 1798	self monitoring		
Health Aspects	Dust and Fiber Free CFC, HFC, HCFC Free		self monitoring			
Indicative Thicknesses & Dimensions	6mm to 25mm & 1m x 1m		self monitoring			
Weighted Sound Absorption Coefficient aw	Depending on material thickness	EN ISO 11654	Fraunhofer			
Thickness (mm)	125	250	500	1000	2000	4000
10	0,01	0,03	0,12	0,36	0,7	0,76
15	0,03	0,08	0,3	0,74	1	0,89
20	0,03	0,12	0,45	0,77	0,75	0,76
25	0,05	0,21	0,61	1,02	0,97	0,99
50	0,15	0,53	0,71	0,73	0,77	0,76
Thickness	10mm	15mm	20mm	25mm	50mm	
aw²	0,20(H)	0,3(MH)	0,40(MH)	0,50(MH)	0,75	
Class	E	D	D	D	C	
NRC	0,3	0,55	0,6	0,7	0,75	


The mentioned values are these which have been measured in our laboratory, under typical conditions.
They can be modified without prior notice. You are kindly requested to assert their validity before any special use.

Sound Absorption

Absorption coefficient acc. to EN 354 for ISOSOUND

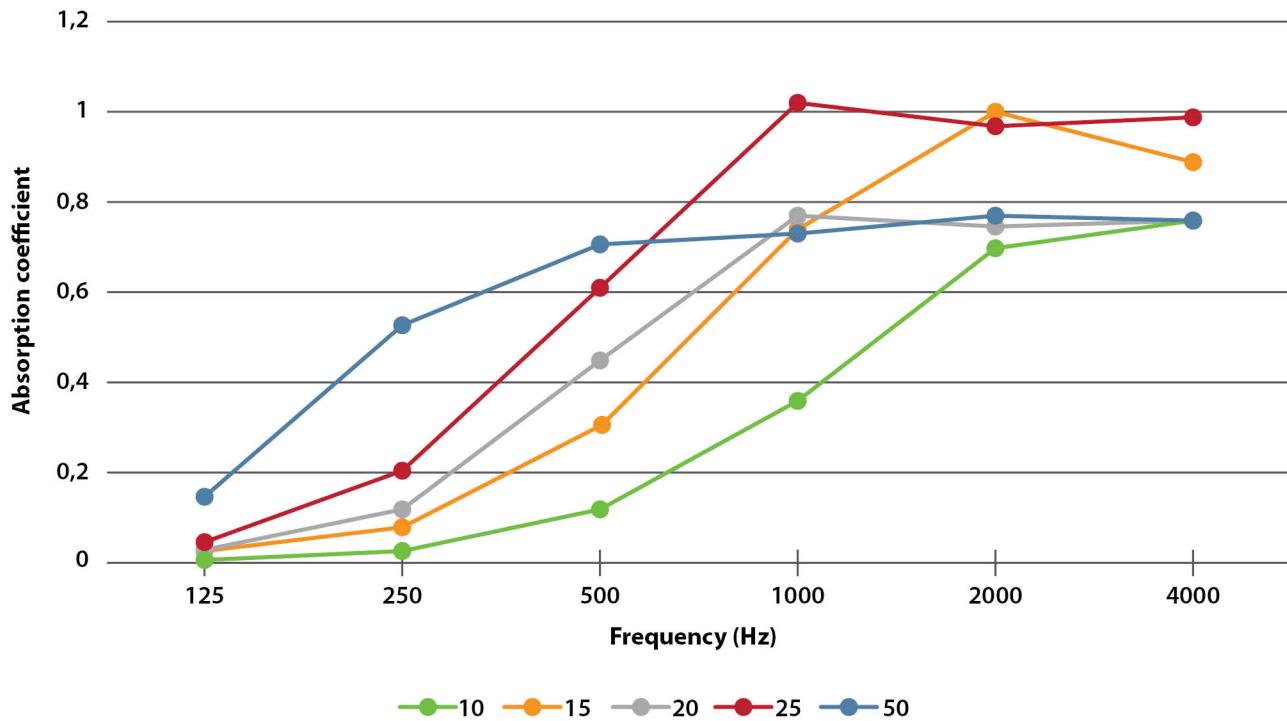

Sound Reduction (Test Reports from Aristotle University of Thessaloniki)

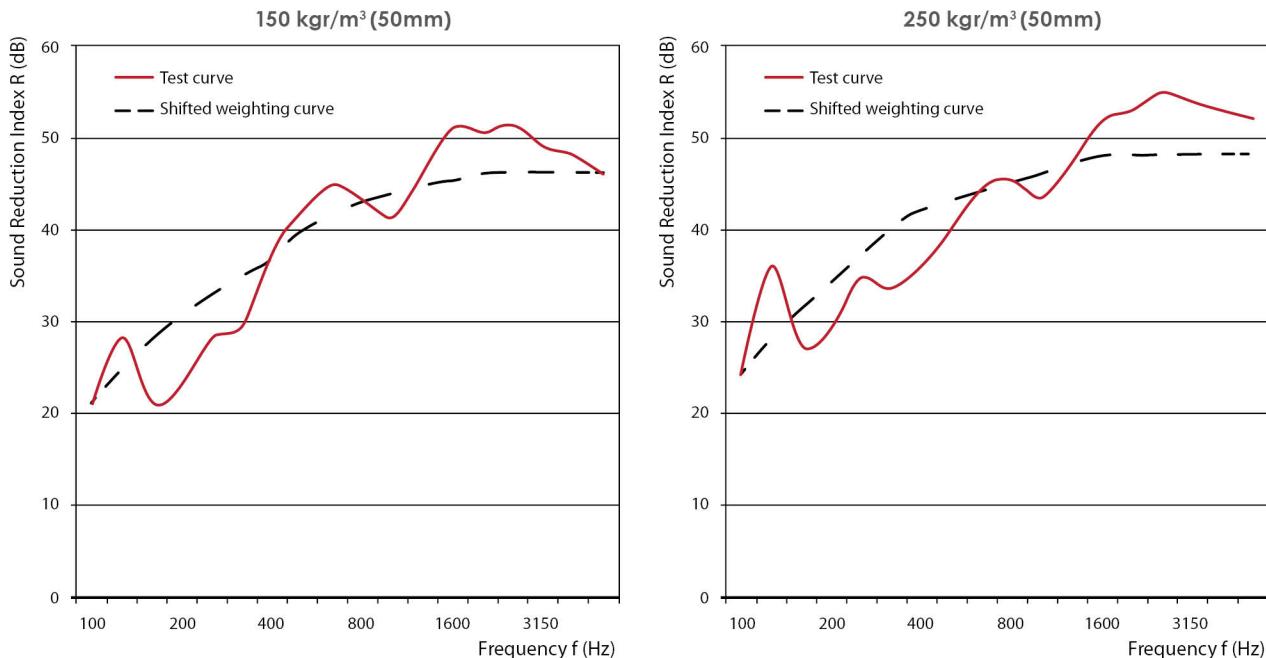

ISOPipe® s.a.

www.isopipe.eu

GREECE
Head Office:
 Nafpliou & Daskalogianni
 144 52 Metamorfosi Attikis
 T.: +30 210 28 28 603
 F.: +30 210 28 19 210
 E.: export@isopipe.gr

Plant:
 73rd km Nat. Road Athens - Lamia
 341 00 Ritsona Halkida
 T.: +30 22620 89 800
 F.: +30 22620 72 006
 E.: export@isopipe.gr

SPAIN
Barcelona:
 C/ Costa i Dau 71 - 79 (esq. C/ Tamarit)
 08205, Sabadell, Barcelona, España
Madrid:
 Calle Pedro Duque, 5,
 Polígono Industrial GITESA,
 28.814- Daganzo de Arriba (Madrid),
 Madrid Community
 T.: +34 93 879 1195
 F.: +34 93 879 1313
 E.: pedidos@isopipe.es

UNITED KINGDOM
Head Office:
 178 Seven Sisters Road
 London N7 7PX
 United Kingdom
Warehouse:
 Airfield Industrial Estate Warboys,
 Huntingdon
 Cambridgeshire PE28 2SH
 United Kingdom
 T: +30 210 28 28 603
 E: orders@isopipe.eu